



1




Prepare the slot and the wires from the driver.

2

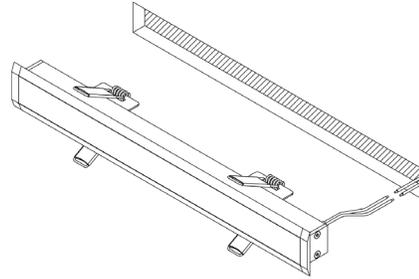


Connect the fixture to the power.

3

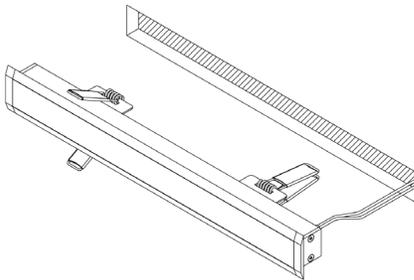


Compress one retaining clip.

4

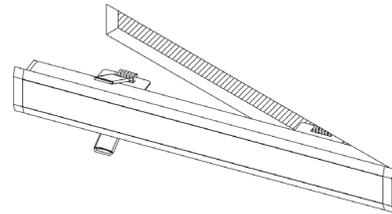

Push one side of the fixture into the slot.

5

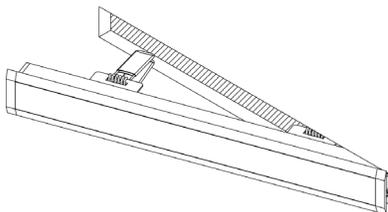

Compress the other retaining clip and push the other side of the fixture into the wall.