




CLECC-020-UD
Constant Current UNIV 5 in 1 dimming
 Plastic Suitable For Dry And Damp Location Enclosure
 Single Circuit: **3-42VDC**
 Total Wattage: **20W max**
 Input Voltage: **100-277V 50/60Hz**



Conforms to UL STD. 8750
 Certified to CSA
 STD. C22.2 No 250.13

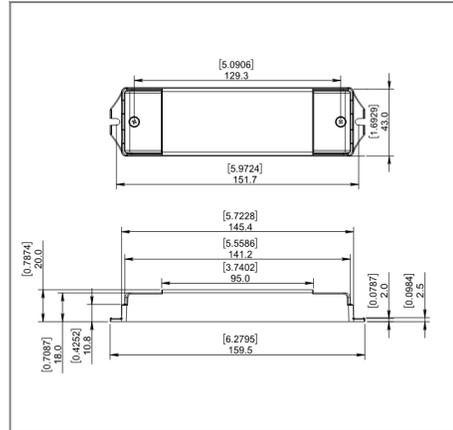

Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM
 Temperature class B(130°C)

Housing

The actual transformer 20W is encapsulated in the enclosure
 The enclosure is Plastic suitable for dry and damp location, IP20, wire
 compartment is optional rated
 Enclosure Temperature does not exceed 65°C at 45°C ambient and fully
 loaded
 Dimensions (inch): H = 1.7, W = 5.7, D = 0.8
 Weight (LBs): 0.33

Electrical Parameters

Input Voltage:	100-277V 50/60Hz
Max. input current at full load:	0.3A
Output voltage without load:	42VDC
Output voltage fully loaded:	0VDC
Max. Total Wattage:	20W
Max. Output Current:	0.7A
Efficiency:	78%
Load regulation:	0%
Ripple:	0%

Output	Rated current (mA)	700mA	600mA	550mA	500mA	450mA	400mA	350mA	250mA
	Current Tolerance	±5%	±5%	±5%	±5%	±5%	±5%	±5%	±5%
	DC Voltage	3-29V	3-33V	3-26V	3-40V	3-42V	3-42V	3-42V	3-42V
	Rated power	20.3W	19.8W	19.8W	20W	18.9W	16.8W	14.7W	10.5W