




## POST MOUNTED PATH LIGHT LARGE

**Led Color:** 3000K, 4000K, 5000K  
**Professional Optical Reflector:** Standard beam angle 20° (30°, 38° available)

**Waterproof:** IP65 glue-free  
**Voltage:** 12V AC/DC  
**Wattage:** 9W

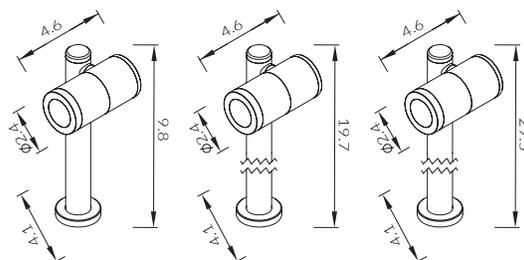

Style	Height	Lamp Style	Wattage	Led Lumens	Beam Angle
<b>PMPA</b>	<b>10</b>	<b>30K</b>	<b>9W</b>	<b>1050LM</b>	<b>20</b>
PMPA (Post Mounted Path Light)	10 (10°) 20 (20°) 30 (30°)	30K (3000K) 40K (4000K) 50K (5000K)			24 (24°) 30 (30°) 38 (38°)