



1

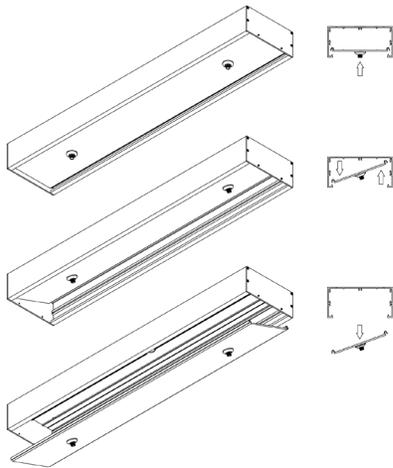

Remove the lid from the canopy.


2

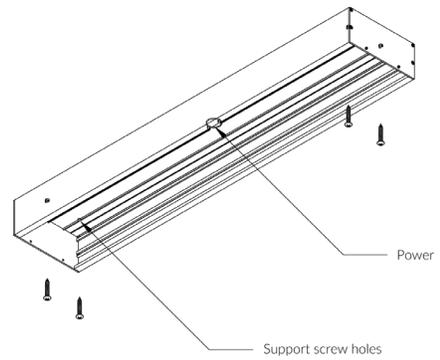

Mount the canopy to the ceiling and connect the power.




3

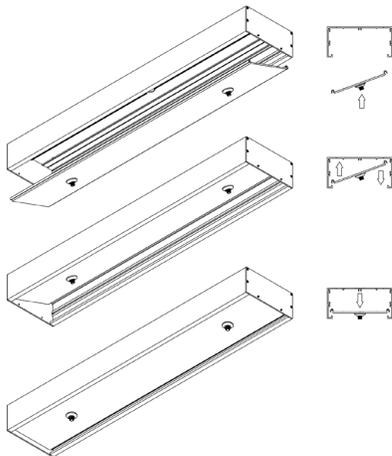

Replace the lid.


4

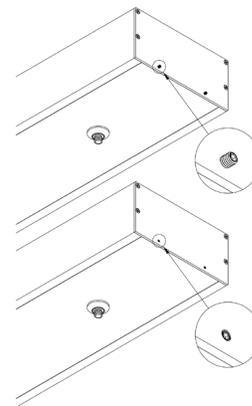

Tighten the side screws until they are flush with the end caps.



5

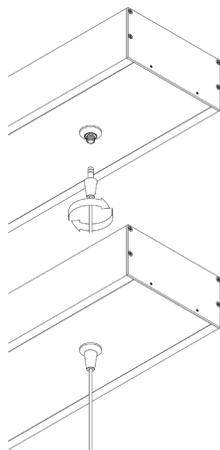

Insert the connector in the hole and screw the cap until the pendant is firmly secured (ensure correct polarity).

